

## Spray Lances and Extensions for Pressure Gun

### Spray Lance

**Feature**

- For use with AL9 spray gun only on page 413

**Specifications**

- Maximum operating pressure: **5000 PSI**
- Maximum temperature: **300°F (149°C)**



Length	Description	Zinc Part #
24"	22 mm x 1.5 mm male inlet x 1/4" male outlet	AL248

### Dual Spray Lances

**Features**

- For use with HPSG, HPSGC, HPSGHD, and HPSGW
- For soap and water
- Requires (1) high pressure nozzle and (1) soap nozzle on page 417
- Allows quick adjustment from high to low pressure with a twist of the handle; low pressure setting allows for use of soap

**Specifications**

- Maximum temperature: **300°F (149°C)**
- **10.5 GPM** flow rate



AL333



AL344

Length	Description	Maximum Operating PSI	Part #
40"	zinc, 1/4" male inlet (2) each 1/4" female outlets	<b>3,650</b>	AL333
	stainless steel, 1/4" male inlet, (2) each 1/4" female outlets	<b>4,000</b>	AL344


### Molded Grip Extensions

**Feature**

- For use with HPSG, HPSGC, HPSGHD, and HPSGW

**Specifications**

- Maximum operating pressure: **5000 PSI**
- Temperature: **302°F (150°C)**
- Maximum flow rate: **10.5 GPM**

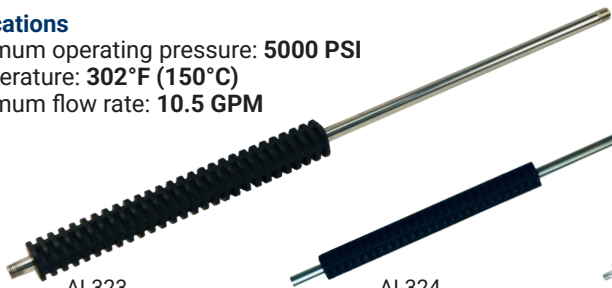

AL323



AL324



AL325 & AL326

Length	Description	Zinc Part #
24"	1/4" male inlet x 1/4" male outlet	AL323XX
36"	1/4" male inlet x 1/4" male outlet, 4" space from the end	AL324XX
48"	1/4" male inlet x 1/4" male outlet, 2 grips	AL325XX
59"	1/4" male inlet x 1/4" male outlet, 2 grips	AL326XX

### Vented Grip Lances

**Features**

- For use with HPSG, HPSGC, HPSGHD, and HPSGW
- For hot water

**Specifications**

- Maximum operating pressure: **5000 PSI**
- Maximum temperature: **300°F (149°C)**
- **10.5 GPM** maximum flow rate



AL361



AL362

Length	Description	Zinc Part #
36"	1/4" male inlet x 1/4" female outlet, straight	AL361
48"	1/4" male inlet x 1/4" female outlet, bent	AL362