FH-SC-Series Sanitary Cartridge Filter Element Housings

Size

· Port connections: 1" - 4"

• Number of elements: 1, 3, 5, 7, 12, and 21

· Cartridge element lengths: 10", 20", 30", and 40"

Features


- Single-cartridge element housings utilize a heavy-duty stainless steel clamp closure for ease of element changes
- Multiple cartridge element housings feature a swing bolt closure to ensure positive sealing and removable bottom plate providing access for cleaning
- Robust construction ensures dependable protection for critical process applications
- · Custom OEM designs available
- Large variety of cartridge elements available to meet your application needs

Materials

- · Product contact: 316L stainless steel
- · Non-contact: 304 stainless steel
- 32Ra, O.D. polish; 25Ra I.D. polish
- · Silicone O-ring seals standard; FKM and EPDM optional

Specifications

- 150 PSI working pressure at 300°F (149°C)
- 1-1/2" clamp vent/gauge connection standard
- · 1/2" clamp drain connection standard
- 222 or 226 cartridge elements
- Clamp connections standard; for optional connections call Dixon Sanitary at 800.789.1718.

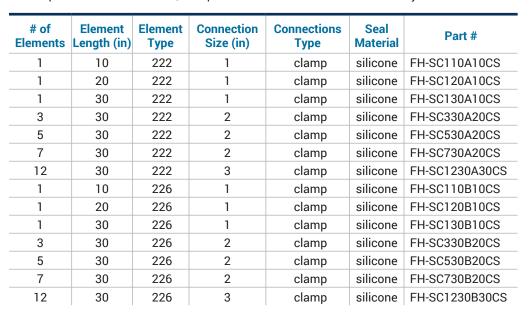

NOTE: Filter elements are not included with the filter housings and must be ordered separately.

