

Reelcraft® 80000 Series Spring Driven Hose Reels

Features

- Reel inlet 3/4" NPTF
- Five-in-one heat treated aluminum casting incorporates main shaft, ratchet, spring arbor, and inlet/outlet plumbing in one-piece casting
- Furnished standard with PVC hose

Specifications

- Maximum temperature is 150°F (66°C) with hose
- Maximum temperature is 210°F (99°C) without hose

With Hose

| Hose I.D. | Hose Length | Service | Working Pressure PSI | Part # |
|-----------|-------------|-------------|----------------------|---------|
| 1/2" | 75' | air / water | 300 | 82075LP |
| | 100' | air / water | 300 | 82100LP |
| 3/4" | 50' | air / water | 250 | 83050LP |

Without Hose

| Hose Capacity | Service | PSI | Part # |
|-----------------------------|-------------|-----|---------|
| 50' of 3/4" or 100' of 1/2" | air / water | 500 | 83000LP |




See below for bumper stops, consult Dixon® for uses other than stated services

F

Adjustable Hose Bumper Stops

| Hose I.D. | Hose O.D. | | Dimensions | | Reel Series Used On | Part # |
|---------------------|-----------|--------|------------|--------|---------------------|------------|
| | From: | To: | B,C,E | D | | |
| 1/4" | .438" | .625" | 2-1/2" | 1-1/4" | 5000 | 1-HR1004A |
| 3/8" | .625" | .749" | 2-1/2" | 1-1/4" | 5000 | 1-HR1004 |
| 3/8" | .625" | .749" | 3" | 1-1/4" | 7000 | 1-HR1004-3 |
| 1/2" or 3/8" 2-wire | .750" | 1.050" | 3" | 1-1/4" | 7000 | 2-HR1004-3 |
| 3/4" | 1.060" | 1.300" | 3" | 1-1/4" | 7000 | 3-HR1004-3 |
| 1/2" | .750" | 1.050" | 3-1/2" | 2-7/8" | 9000 | 2-HR1005 |
| 3/4" | 1.060" | 1.380" | 3-1/2" | 2-7/8" | 9000 | 3-HR1005 |
| 1" | 1.390" | 1.550" | 3-1/2" | 2-7/8" | 9000 | 4-HR1005 |

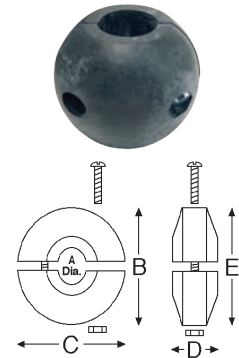

NOTE: Not included on hose reels ordered without hose; must order separately

Reelcraft® 30000 Manual Driven Hose Reels

Features

- Reel frame, spool, and drum are fabricated from heavy gauge steel
- All bolted construction - no welds
- Manual driven standard
- Motor drive available

Without hose

| Hose I.D. | Inlet | Hose Capacity | Spool Width | Working Pressure PSI | Part # |
|-----------|-------|---------------|-------------|----------------------|---------|
| 3/4" | 3/4" | 100' | 12" | 1000 | C33112L |
| 1/2" | 1/2" | 200' | 12" | 3000 | C32112M |

